

Data Sheet

B&K Precision's model 1253 is an affordable HDTV test pattern generator that delivers accurate test patterns for the testing of the most common HDTV displays including Plasma, LCD, TFT, CRT, DLP, GLV and OLED digital display products. The 1253 can display from its HDTV Component (YPbPr) outputs or S-Video output(Luminance patterns only), fourteen of the most useful patterns for twelve of the most commonly used video formats. It is lightweight and portable and is ideal for on-the-bench and in-the-field testing. The 1253 is a must for TV repair engineers or technicians to test and calibrate digital televisions, Video Engineers to test and maintain studio equipment or Home Theater Installation Technicians to fine-tune the picture quality of digital televisions. The 1253 displays the most popular formats including 1920 x 1080 30i, 1280 x 720 60p, 704 x 480 60p, NTSC, PAL & SECAM. A unique feature of the 1253 is the Overscan DVD Aspect Ratio pattern. This feature covers the most commonly use aspect ratios used for all movies recorded to DVD media.



Specifications


Video Formats	1	1920x1080 30i
	2	1920x1080 30p
	3	1920x1080 24p
	4	1280x720 60p
	5	1280x720 30p
	6	1280x720 24p
	7	704x480 60p
	8	704x480 30p
	9	704x480 30i
	10	*NTSC
	11	*PAL
	12	*SECAM
Patterns	1	SMPTE Bars [75%, 100%] (power up default is 75%)
	2	PLUGE
	3	Needle
	4	Color Bars [75%, 100%]
	5	Cross Hatch [16:9, 12:9(4:3)]
	6	DVD Aspect Ratio [1.33:1, 1.78:1, 1.85:1, 2.35:1]
	7	Raster [75% wht, yel, cyn, grn, mag, red, blu, blk]
	8	Multiburst
	9	Focus
	10	Staircase
	11	ANSI Gray
	12	Window [2.5 IRE steps from Black to White]
	13	Checker
	14	Overscan - Bounce
Operation	15 buttons, 1 Power Switch	
Y Output	1V peak-to-peak into 75 ohms, on BNC	
Pb, Pr Outputs	0.7V peak-to-peak into 75 ohms, on BNC	
S-Video (SVHS)	5 Pin Din	
Video Output Buffer Response	100MHz @ -3dB	
Power Supply	9V Alkaline Battery	
Power Indicator	Red LED	
Timing Accuracy	25ppm (0.0025%)	
Video Level error	< 1.5%	
Size (LxWxD)	5.6" x 3.1" x 1.1" (142 x 79 x 28mm)	
Weight (Approx.)	6.2 oz (176 g)	

* S-Video output provides luminance patterns only

Data sheet

Benchtop Computer Monitor, PC and MAC, Video Generator

Model 1280B

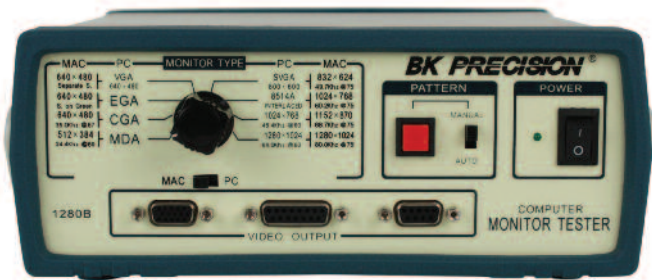

The 1280A is a fully featured bench top design to test both Mac and PC monitors. All patterns can be manually selected or place the 1280A in Auto for automatic cycling of each available pattern. Designed to test (burn in) one to four monitors, the 1280A can also be used as a display generator. Full color, green, blue, red, black and white.

Features:

- PC and Mac Patterns
- 16 Monitor Types/Resolution Selections
- Color bar, Cross Hatch, Dot, Raster, Windows® selection
- VGA, SVGA, RGB, HV,V & Four DB 15 (Rear panel) for multiple monitor burn in

Specifications

model

1280B

Available Patterns

	Color Bars
	Black Raster
	Color Rasters
	Window
	Dot
	Crosshatch
	Multiple Outputs
	RGB
	H/HV Sync
	V Sync
	Auto/Manual
	Gray scale

Resolutions

PC	
	1280 x 1024
	1024 x 768 (non-interlaced)
	8415A (interlaced)
	SVGA 800 x 600
	SVGA 1024 x 768
	VGA 640 x 480
	VGA 640 x 350
	VGA 720 x 400
	EGA
	CGA
	MDA
Mac	
	1280 x 1024
	1152 x 870
	1024 X 768 (non-interlaced)
	832 x 624
	640 x 480
	512 x 384

GENERAL

Power Source	9V battery or AC adapter
Dimensions	3.125 x 9.44 x 9.25" (78 x 240 x 235mm)
Weight	2.5lbs. (1.1kg)

One Year Warranty

Accessories

Supplied: BE 12 AC adapter



Metrix Electronics Limited

Minchens Court, Minchens Lane, Bramley, RG26 5BH, U.K.

Tel: +44 (0)845 034 3234, Fax: +44 (0)845 034 3233

E-mail: sales@metrix-electronics.com, Web: www.metrix-electronics.com